


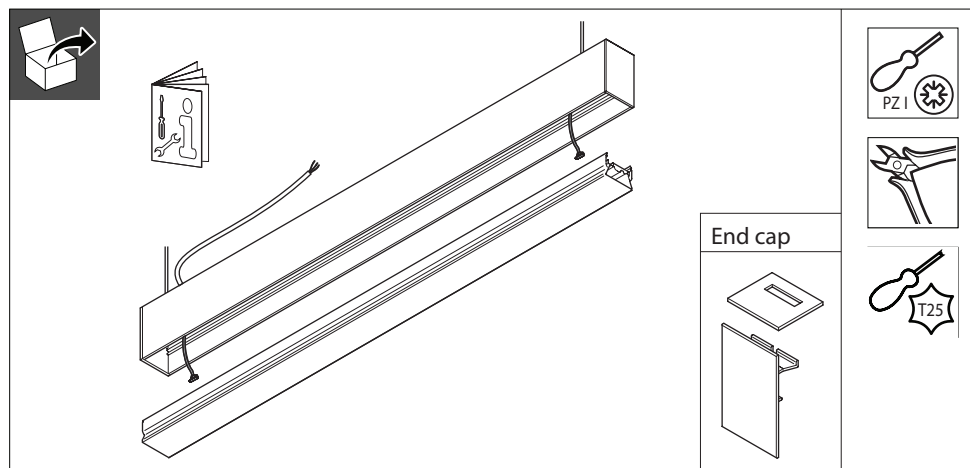
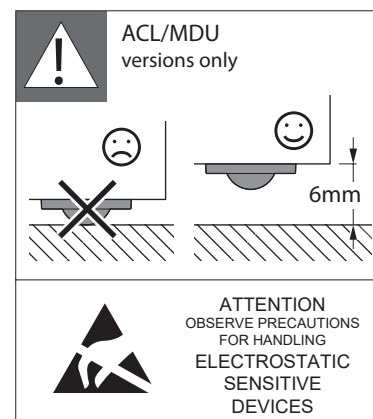
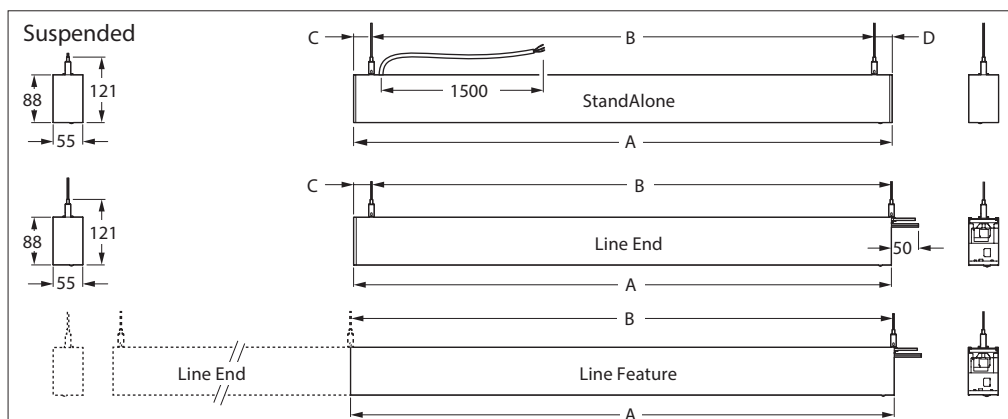
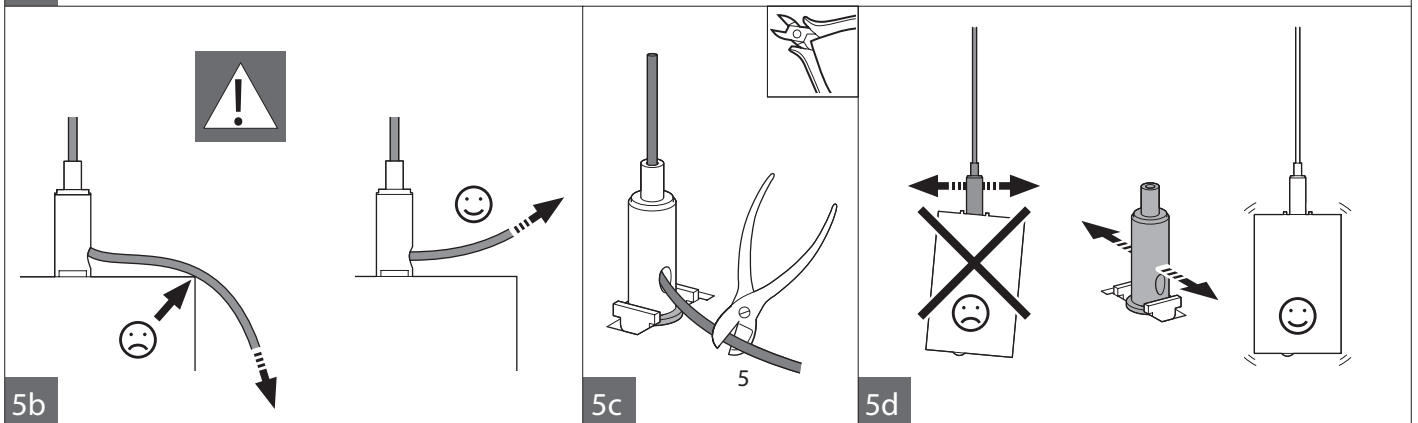
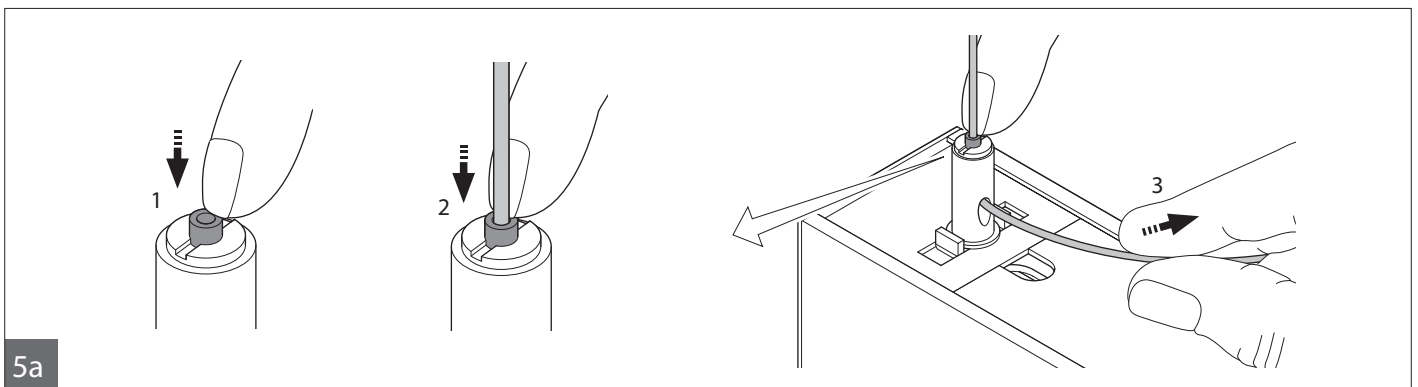
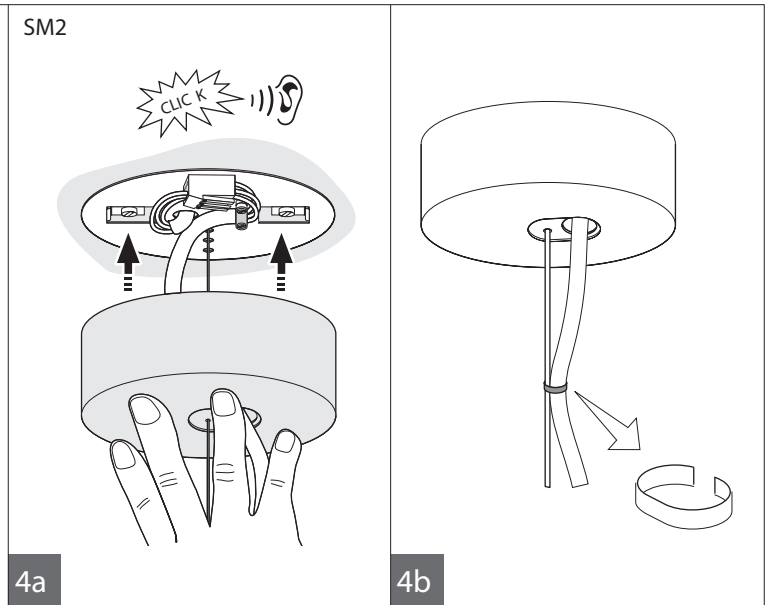
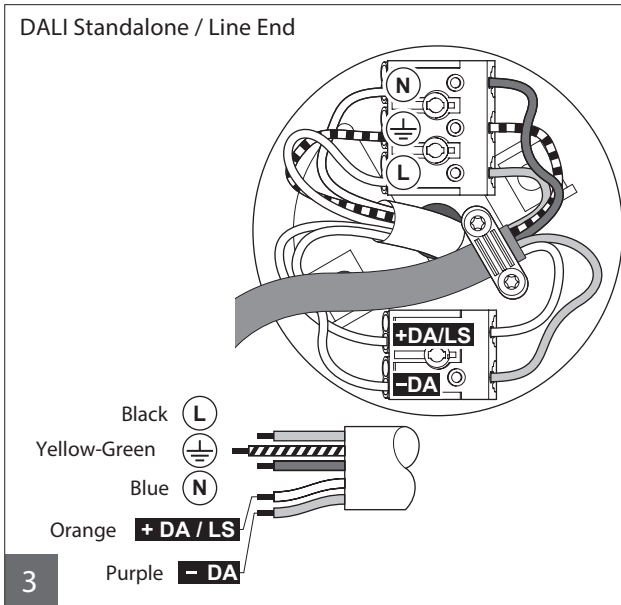
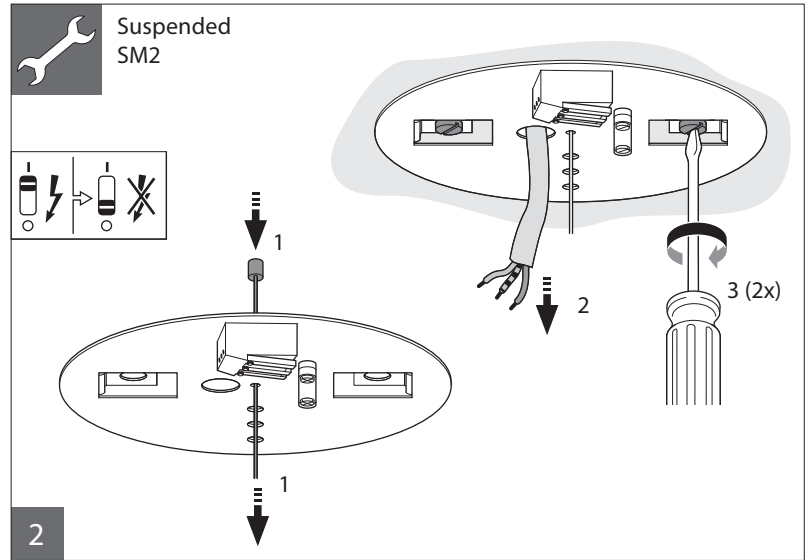






Dimensions in mm					Sensor/ Blind sensor holder.	kg
Suspended	A	B	C	D		
Standalone	L1130	1130	1064			3.2
	L1170	1170	1104		•	3.4
	L1410	1409	1344	33		3.8
	L1450	1449	1384		•	4.1
Line End	L1130	1128	1095			3.2
	L1170	1168	1135		•	3.4
	L1410	1408	1375	33	0	3.8
	L1450	1448	1415		•	4.1
Line Feature	L1130	1127	1127			3.2
	L1170	1167	1167		•	3.4
	L1410	1406	1406	0	0	3.8
	L1450	1446	1446		•	4.1

Suspension set contents							
SM2	SP530P BV/LE	•	•	•	•	•	
	SP530P LF			•	•		•
SMTT	SP530P BV/LE			2x	•	•	2x
	SP530P LF			•	•	•	•
SW2	SP530P BV/LE			2x	•		
	SP530P LF			•	•	•	

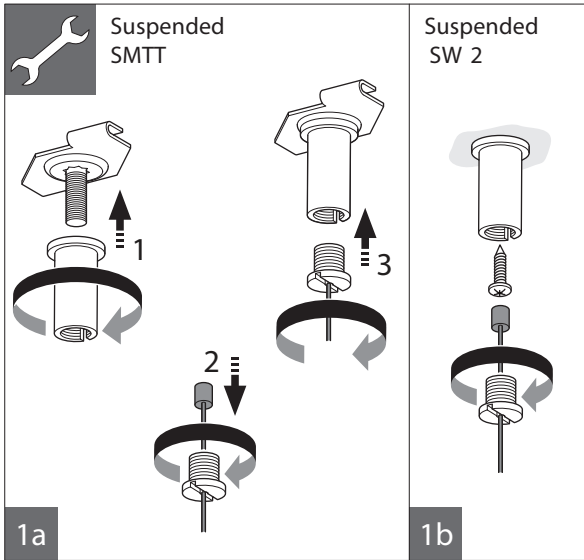

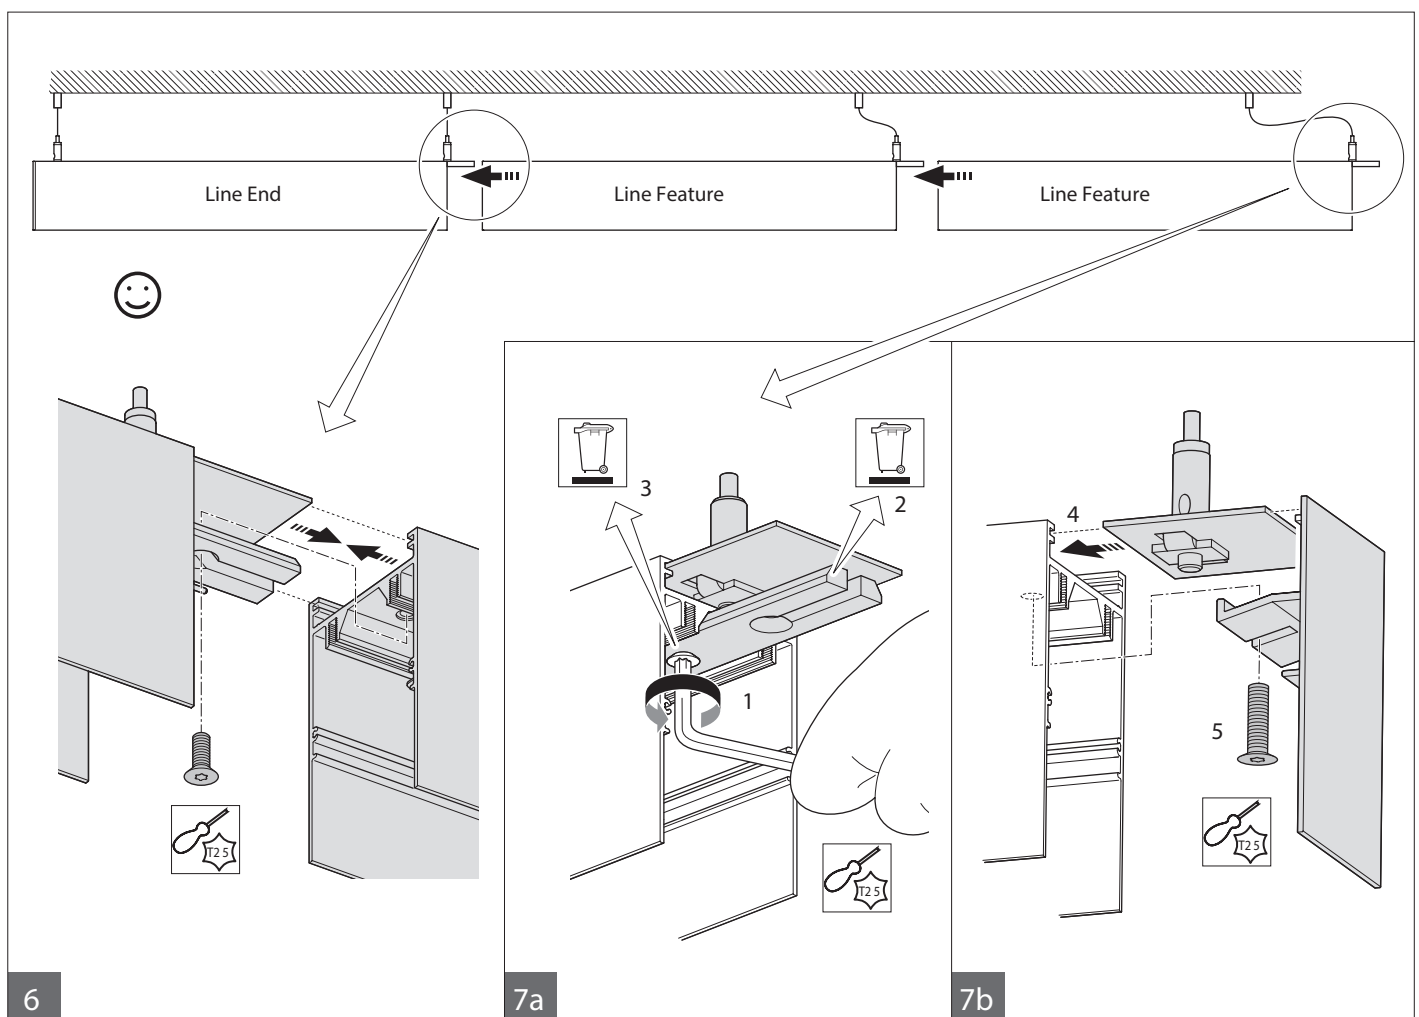

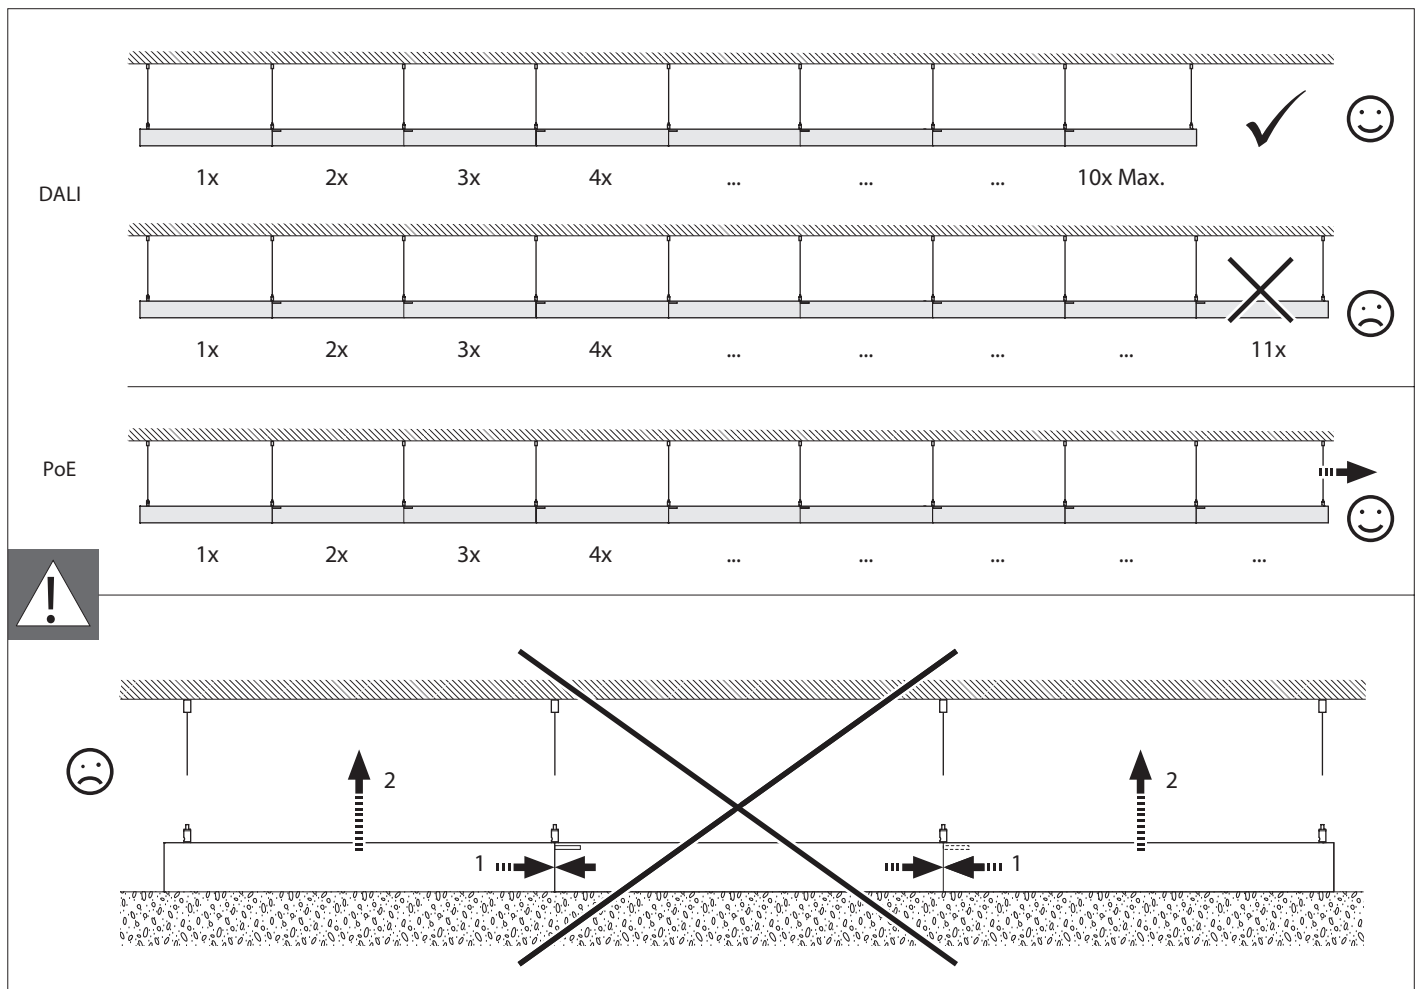

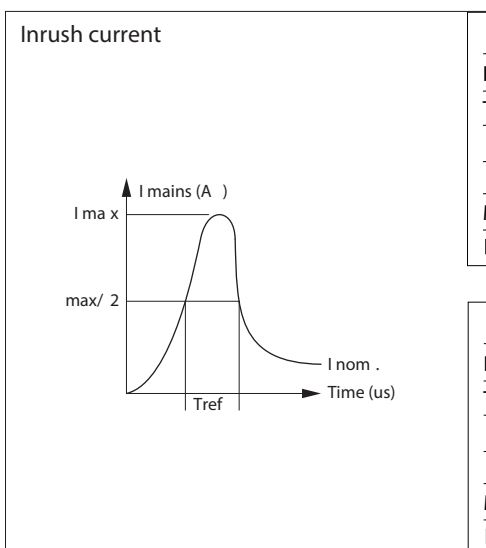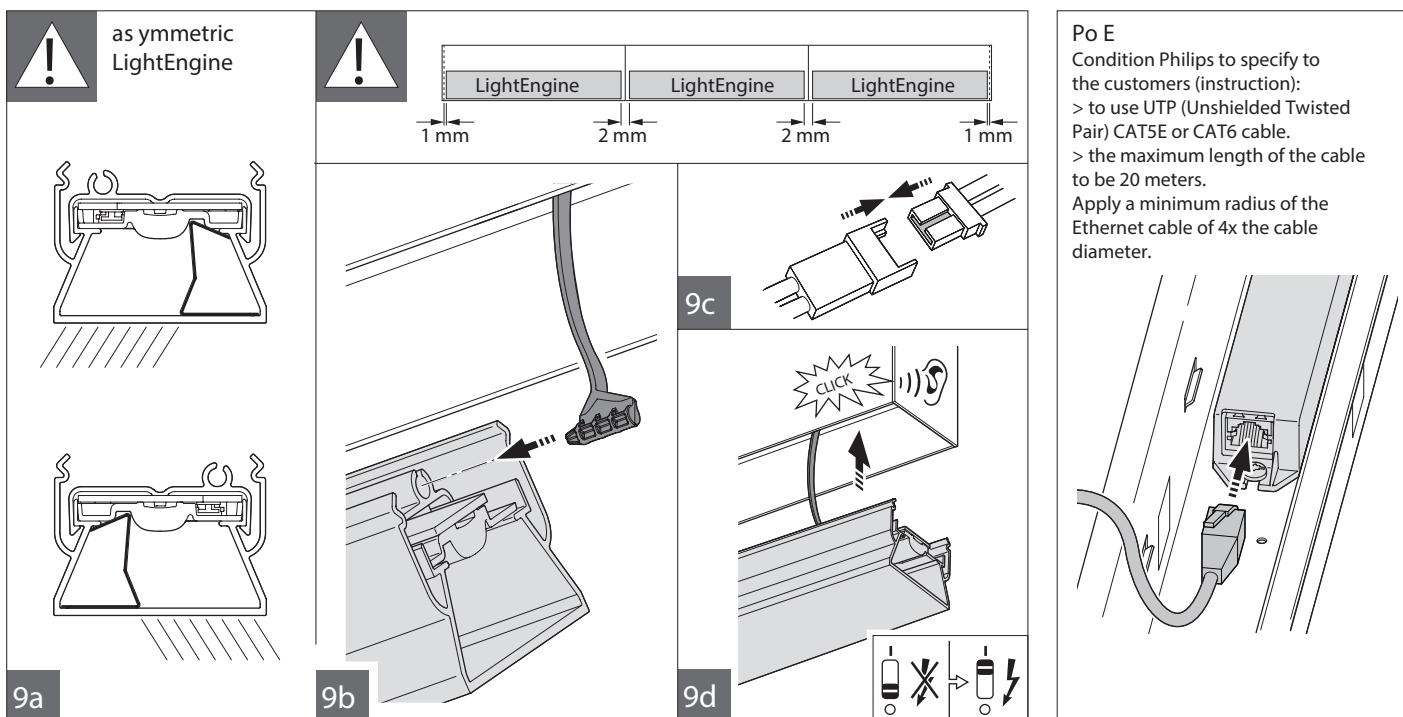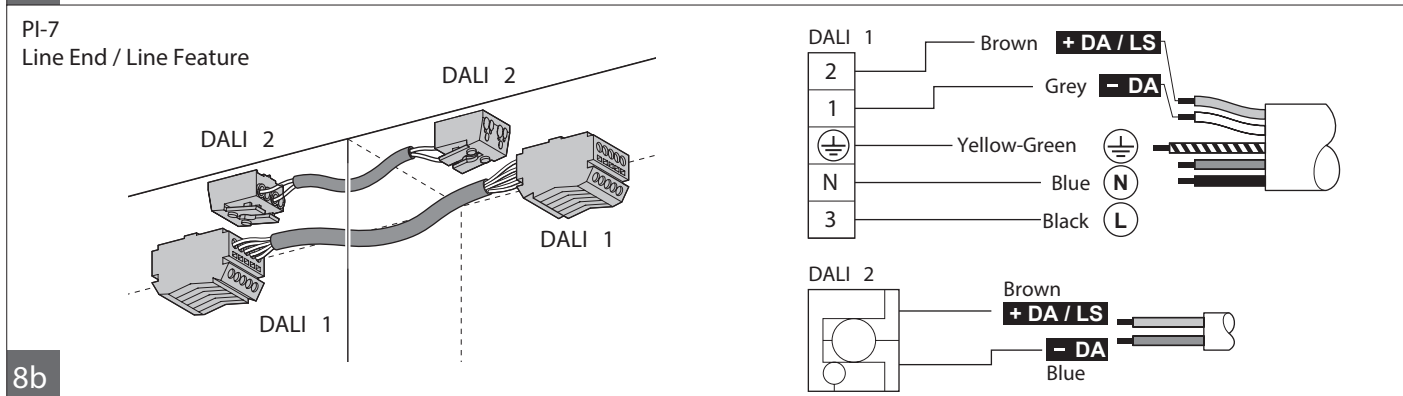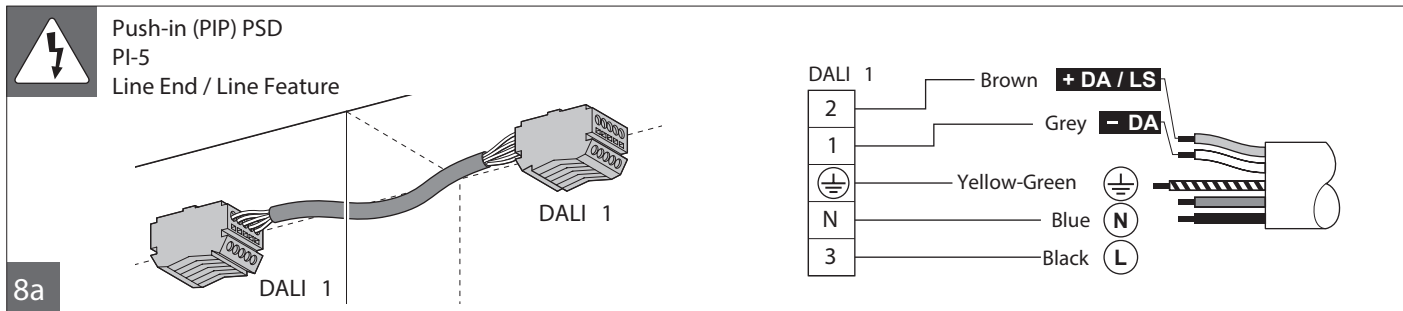

PSD	
Imax.(A)	21
Tref(μs)	280
Condition: Input voltage 230V	
MCB	Luminaires Max.
B- 16A	24

SRD	
Imax.(A)	21
Tref(μs)	280
Condition: Input voltage 230V	
MCB	Luminaires Max.
B- 16A	21